

VISTA

designcase



Vista 4 and Prism case with joinery by Designcraft - Melbourne Gallery, Melbourne Museum (above)

Vista 1 - Melbourne Gallery, Melbourne Museum (below)



*Vista 1 case -
National Portrait Gallery, Canberra*



Vista 1 - Conflicts 1945 to Today, Australian War Memorial

The minimalist Vista style case, features optimum visibility with security protection. The clear glass top enables objects to be lit from external sources or by internal fibre optic LED lights. Vista cases can be single or multi-bay, freestanding or on a plinth or platform, and even wall mounted.

Access is by a pull and slide hardened steel door mechanism for smooth effortless operation, having 60% opening to left and right. For the installation of very large objects the door can be fully removed. Vista 4 cases are available with hinged doors only.

- Vista 1** cases are single or double-bay with glass top and a 19mm U channel to locate the top door.
- Vista 2** cases are multi-bay with an all glass top and a double 19mm U channel to locate the top door.
- Vista 3** cases are single or double-bay with clear glass top with a 30mm faceted top section all round to take rod suspension shelving.
- Vista 4** cases are single or multi-bay with clear glass top with a 75mm section at the top of the case to support the door hinge and hanging track to take rod suspension shelving. They have a fully concealed dual action hinged door system allowing all panels in a case run to be specified as opening doors.

designcase

Where cases may need to be relocated, where access is an issue into a space, or cases are for temporary or touring exhibitions, Vista 3 & 4 cases are available in demountable form from the TESS range. Vista 3 & 4 cases offer a choice of adjustable shelving systems. The system frame is supplied with a powder coated finish to any Dulux or Interpon powder coat colour specification with other finishes available on application.


High Security Abloy™ locks are fitted as standard in addition to a two way structural locking system. Museum quality laminated security or anti-bandit specification glass is standard and this provides important protection from external UV radiation. The option of low iron glass ensures that delicately coloured items such as illuminated manuscripts, textiles and art are seen in their true colours.

All materials used within the display chamber are either inert or conform to international museum conservation standards. Various forms of Artsorb™ such as sheet or beads can be concealed within the case to provide control of the relative humidity. Likewise various other materials such as activated charcoal can be incorporated to cope with any emissions from the objects themselves.

all glass case with clear top

VISTA

designcase

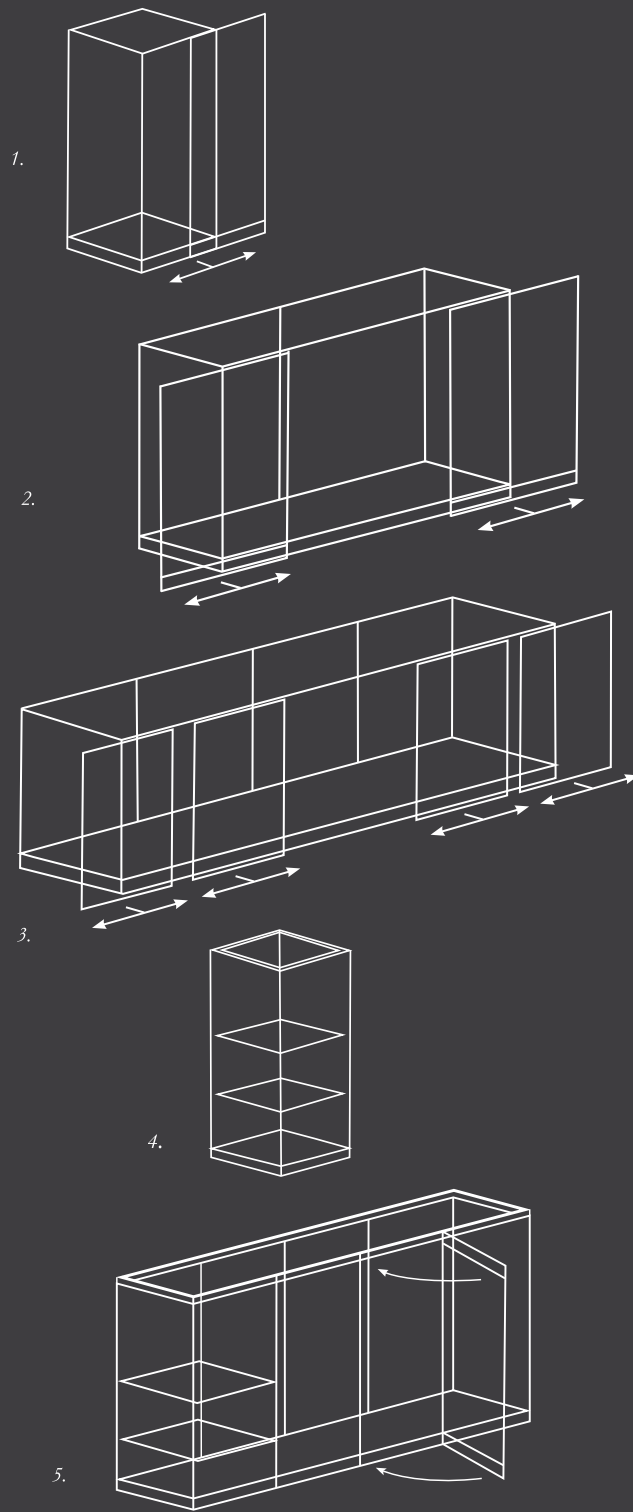

Vista 4 and Vista 1 case - Melbourne Gallery, Melbourne Museum

- 1. Vista 1
- 2. Vista 1
- 3. Vista 2
- 4. Vista 3
- 5. Vista 4



Vista 1 case (above and below)



GUIDELINES

System name	Vista
Main features	Secure all glass case for optimum visibility with clear glass top for external lighting.
Format	Single or multi-bay. Freestanding on a plinth. Full height glass as standard. Mounted on or against a wall.
Access	Vista 1, 2 & 3: Precision engineered pull and slide door system with 60% opening to left and right and fully removable door if required. Vista 4: Fully concealed dual action hinged door system with door size restrictions.
System frame	Vista 1. Top: 19mm aluminium U channel to door edge. Bottom: 125mm aluminium section Vista 2. Top: double 19mm aluminium U channel to door edge. Bottom: 125mm aluminium section Vista 3. Top: 30mm faceted aluminium section all round. Bottom: 125mm aluminium section Vista 4. Top: 75mm aluminium section all round. Bottom: 125mm aluminium section, 75mm to smaller cases *Aluminium extrusions powder coated finish to any Dulux or Interpon powder coat colour reference.
Max glass height	2500mm
Min glass height	500mm
Max door width	3000mm
Max panel size	4 square metres
Glass thickness	8.8 - 13.5mm laminated museum glass to either BS 6206A safety glass or BS 5544 anti-bandit specification.
Locking	2 x No.Abloy™ CL291 removable cartridge locks to conceal secure mechanical locking system.
Glass	Standard or low iron laminated museum glass which filters over 97% of UV radiation between 320 & 380 nanometers. Non reflective glass option.
Internal Panels	EO MDF with appropriate sealing and inert spray finish or approved fabric covering to clients specifications.
Door seal	Extruded silicone bubble seal.
Glass to metal joints	Neutral curing silicone to allow for differential thermal expansion.
Lighting	Internal fibre-optic LED lighting or from external source.
Shelving	Vista 3 & 4 fully height adjustable with suspended hanging rods. Vista 1 with panel back - cantilever shelf supports.
Environmental conditioning	Humidity, temperature and pollution control can be provided passively or through our specialised equipment.